











Microphone Picture & Model Number	Function & Technical Parameter
 <p>HT-7000Ac Chairman Unit HT-7000Ad Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 230×110×70mm</li> <li>▶ Installation dimension: 201×98mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 0.7kg</li> <li>▶ Support discuss &amp; video</li> <li>▶ Built-in inner speaker</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-7000Bc Chairman Unit HT-7000Bd Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 150×135×53mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 0.7kg</li> <li>▶ Support discuss &amp; video</li> <li>▶ Built-in inner speaker</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-7010c Chairman Unit HT-7010d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 256×90×60mm</li> <li>▶ Installation dimension: 227×86mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 0.7kg</li> <li>▶ Support discuss &amp; video</li> <li>▶ Built-in inner speaker &amp; LCD</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-7100c Chairman Unit HT-7100d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 230×110×70mm</li> <li>▶ Installation dimension: 201×98mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 0.7kg</li> <li>▶ Discuss, video &amp; voting</li> <li>▶ Built-in inner speaker</li> <li>▶ IC card/key press sign in option</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-7110c Chairman Unit HT-7110d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 230×110×70mm</li> <li>▶ Installation dimension: 200×95mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 0.7kg</li> <li>▶ Discuss, video &amp; voting</li> <li>▶ Built-in inner speaker &amp; LCD</li> <li>▶ Chairman with priority button</li> </ul>

Microphone Picture & Model Number	Function & Technical Parameter
 <p>HT-7200c Chairman Unit HT-7200d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 245×145×55mm</li> <li>▶ Length of gooseneck: 350mm</li> <li>▶ N.W: 1.2kg</li> <li>▶ Discuss, video &amp; voting</li> <li>▶ Built-in inner speaker</li> <li>▶ Key press sign in</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-7210c Chairman Unit HT-7210d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 245×140×48mm</li> <li>▶ Length of gooseneck: 380mm</li> <li>▶ N.W: 1kg</li> <li>▶ Discuss &amp; video &amp; voting</li> <li>▶ Built-in inner speaker</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-7300c Chairman Unit HT-7300d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 245×145×55mm</li> <li>▶ Length of gooseneck: 350mm</li> <li>▶ N.W: 1.2kg</li> <li>▶ Discuss &amp; video</li> <li>▶ Built-in inner speaker</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-7500c Chairman Unit HT-7500d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 165×135×60mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 0.8kg</li> <li>▶ Discuss &amp; video</li> <li>▶ Built-in inner speaker</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-7600c Chairman Unit HT-7600d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 205×150×55mm</li> <li>▶ Length of gooseneck: 410mm</li> <li>▶ N.W: 0.9kg</li> <li>▶ Discuss &amp; video</li> <li>▶ Built-in inner speaker</li> <li>▶ Chairman with priority button</li> </ul>

Microphone Picture & Model Number	Function & Technical Parameter
 <p>HT-7700c Chairman Unit HT-7700d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 205×150×55mm</li> <li>▶ Length of gooseneck: 410mm</li> <li>▶ N.W: 0.9kg</li> <li>▶ Discuss, video &amp; voting</li> <li>▶ Built-in inner speaker</li> <li>▶ Key press sign in</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-7800c Chairman Unit HT-7800d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 245×150×60mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 0.7kg</li> <li>▶ Discuss, video &amp; voting</li> <li>▶ Built-in inner speaker &amp; LCD</li> <li>▶ IC card/Key press sign in option</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-7800Ac Chairman Unit HT-7800Ad Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 207×117×60mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 1kg</li> <li>▶ Discuss, video &amp; voting</li> <li>▶ Built-in inner speaker &amp; LCD</li> <li>▶ IC card/Key press sign in option</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-7800Bc Chairman Unit HT-7800Bd Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 207×117×60mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 1kg</li> <li>▶ Discuss, video, voting &amp; USB recording</li> <li>▶ Built-in inner speaker &amp; LCD</li> <li>▶ IC card/Key press sign in option</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-7900c Chairman Unit HT-7900d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 245×150×60mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 0.7kg</li> <li>▶ Discuss, video, voting &amp; interpretation</li> <li>▶ Built-in inner speaker &amp; LCD</li> <li>▶ IC card/Key press sign in option</li> <li>▶ Chairman with priority button</li> </ul>

Microphone Picture & Model Number	Function & Technical Parameter
 <p>HT-7900Ac Chairman Unit HT-7900Ad Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 207×117×60mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 0.7kg</li> <li>▶ Discuss, video, voting &amp; interpretation</li> <li>▶ Built-in inner speaker &amp; LCD</li> <li>▶ IC card/Key press sign in option</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-8100c Chairman Unit HT-8100d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 277×106×48mm</li> <li>▶ Installation dimension: 250×102mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 0.9kg</li> <li>▶ Discuss, video, voting &amp; interpretation</li> <li>▶ Built-in inner speaker &amp; LCD</li> <li>▶ IC card/Key press sign in option</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-8200c Chairman Unit HT-8200d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 130×160×50mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 0.8kg</li> <li>▶ Discuss &amp; video</li> <li>▶ Built-in inner speaker</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-8300c Chairman Unit HT-8300d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 243×145×65mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 1kg</li> <li>▶ Discuss &amp; video</li> <li>▶ Built-in inner speaker &amp; LCD</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-8300Ac Chairman Unit HT-8300Ad Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 243×145×65mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 0.73kg</li> <li>▶ Discuss &amp; video</li> <li>▶ Equipped with E-desk unit</li> <li>▶ Built-in inner speaker &amp; LCD</li> <li>▶ Chairman with priority button</li> </ul>



Microphone Picture & Model Number	Function & Technical Parameter
 <p>HT-ZP2 E-Desk Unit (option for HT-8300A series Mic)</p>	<ul style="list-style-type: none"> <li>▶ LCD type: 7" TFT 16:9</li> <li>▶ Resolution: 800 x 480, 262K color</li> <li>▶ Dimension: 200×110×20mm</li> <li>▶ Connection interface: Type A USB</li> </ul>
 <p>HT-8310c Chairman Unit HT-8310d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 150×170×67mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 1kg</li> <li>▶ Discuss &amp; video</li> <li>▶ Built-in inner speaker</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-8320c Chairman Unit HT-8320d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 150×170×67mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 1kg</li> <li>▶ Discuss, video &amp; voting</li> <li>▶ Built-in inner speaker</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-838c Chairman Unit HT-838d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 245×150×60mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 1kg</li> <li>▶ Discuss, video, voting &amp; interpretation</li> <li>▶ Built-in inner speaker &amp; LCD</li> <li>▶ IC card/Key press sign in option</li> <li>▶ Chairman with priority button</li> </ul>
 <p>HT-8400c Chairman Unit HT-8400d Delegate Unit</p>	<ul style="list-style-type: none"> <li>▶ Frequency response: 40Hz-16kHz</li> <li>▶ Sensitivity: -44 dB±2dB</li> <li>▶ Dimension: 207×117×60mm</li> <li>▶ Length of gooseneck: 390mm</li> <li>▶ N.W: 1kg</li> <li>▶ Discuss &amp; video</li> <li>▶ Built-in inner speaker &amp; LCD</li> <li>▶ Chairman with priority button</li> </ul>



HT-611y Interpreter Unit

- ▶ Frequency response: 40Hz-16kHz
- ▶ Sensitivity: -44 dB±2dB
- ▶ Dimension: 245×150×60mm
- ▶ Length of gooseneck: 390mm
- ▶ N.W: 0.7kg
- ▶ 6+1 channels
- ▶ Built-in inner speaker & LCD
- ▶ Prevention on interpreter's cough.



HT-ZP1 E-Desk Unit

- ▶ Outer LCD type: 7" TFT 16:9
- ▶ Resolution: 800 x 480, 262K color
- ▶ Inner LCD Resolution: 160 x 32
- ▶ Dimension: 230×136×96mm
- ▶ Power adaptor: 14V/500mA
- ▶ Battery: 12V/4000mAH
- ▶ Connection interface: USB/Power jack


**Equipment and Function List**

Main Unit Microphone	HT-7000 Main Unit			HT-6600 Main Unit			HT-7300 Main Unit		
	Discuss	Video	Vote	Discuss	Video	Vote	Discuss	Video	Vote
HT-7000Ac/d	V	*		V	*		V	V	
HT-7000Bc/d	V	*		V	*		V	V	
HT-7010c/d	V	*		V	*		V	V	
HT-7100c/d	V	*	●	V	*	●	V	V	V
HT-7110c/d	V	*	●	V	*	●	V	V	V
HT-7200c/d	V	*	●	V	*	●	V	V	V
HT-7210c/d	V	*	●	V	*	●	V	V	V
HT-7300c/d	V	*		V	*		V	V	
HT-7500c/d	V	*		V	*		V	V	
HT-7600c/d	V	*		V	*		V	V	
HT-7700c/d	V	*	●	V	*	●	V	V	V
HT-7800c/d	V	*	●	V	*	●	V	V	V
HT-7800Ac/d	V	*	●	V	*	●	V	V	V
HT-7800Bc/d	V	*	●	V	*	●	V	V	V
HT-8200c/d	V	*		V	*		V	V	
HT-8300c/d	V	*		V	*		V	V	
HT-8300Ac/d	V	*		V	*		V	V	
HT-8400c/d	V	*		V	*		V	V	
HT-8310c/d	V	*		V	*		V	V	
HT-8320c/d	V	*	●	V	*	●	V	V	V


Function Details	HT-7200 Main Unit			
	Discuss	Video	Vote	Interpretation
HT-7900c/d	V	V	V	V
HT-7900Ac/d	V	V	V	V
HT-8100c/d	V	V	V	V
HT-838c/d	V	V	V	V

- ▶ V = Achieve the function without other equipments
- ▶ \* = Add HT-8008 video processor to achieve video camera auto-track function
- ▶ ● = Add HT-8000 voting processor to achieve voting function

HT-7000 System Connection Diagram

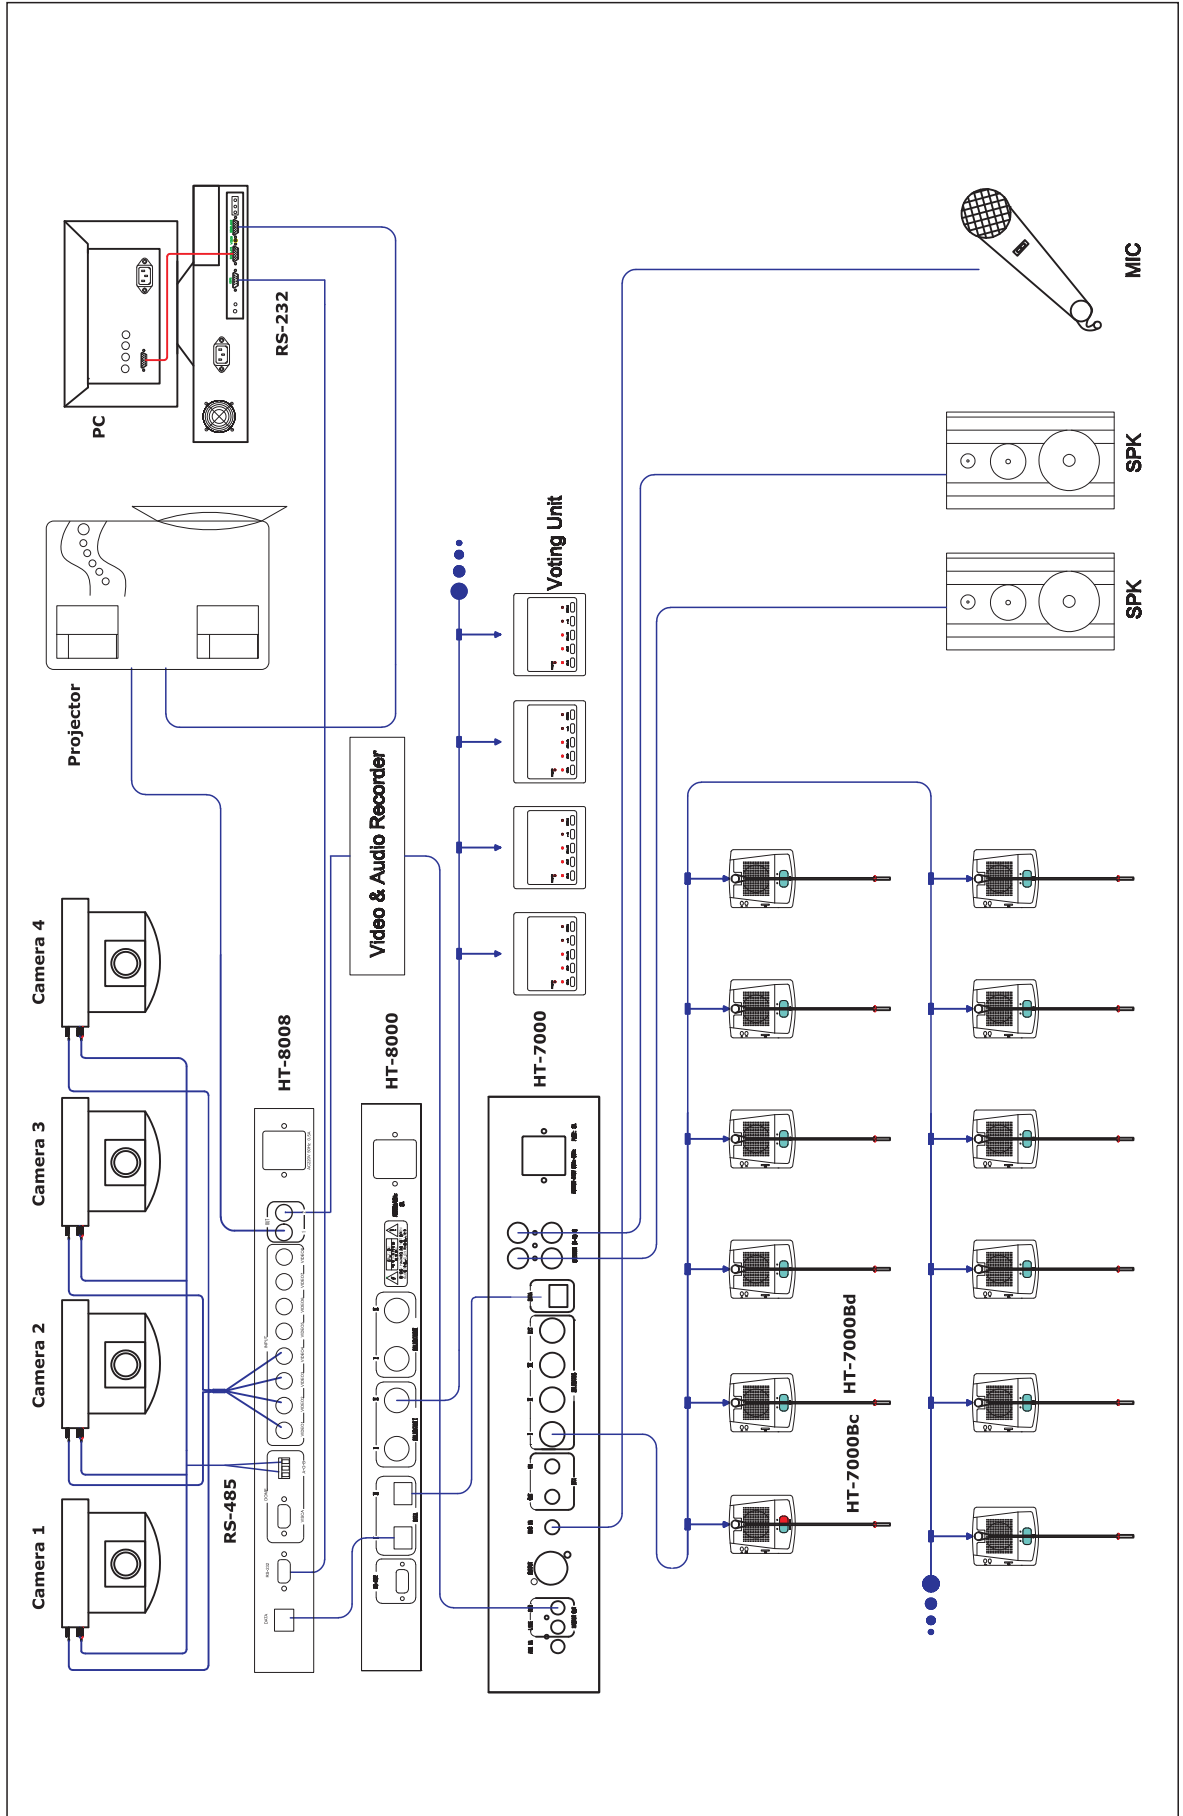


### HT-6600 System Connection Diagram

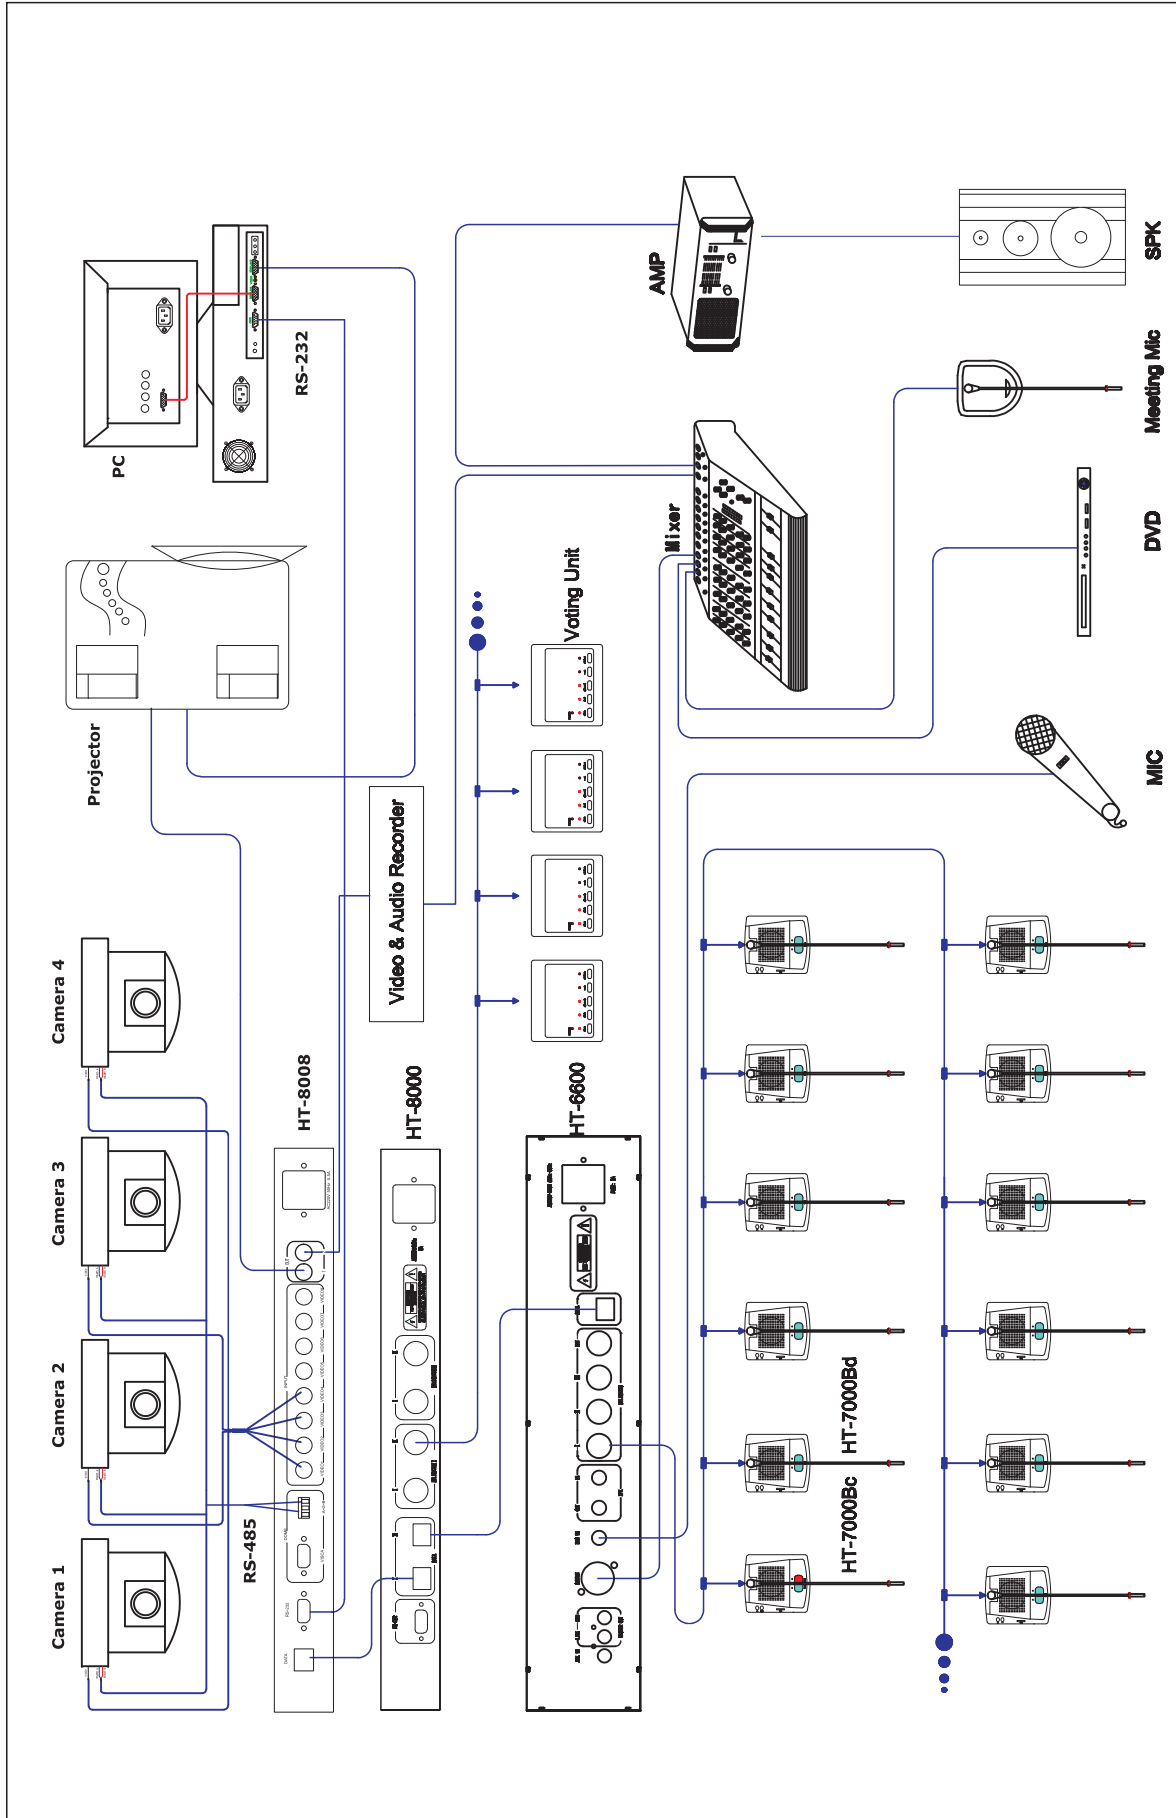



HT-7300 System Connection Diagram

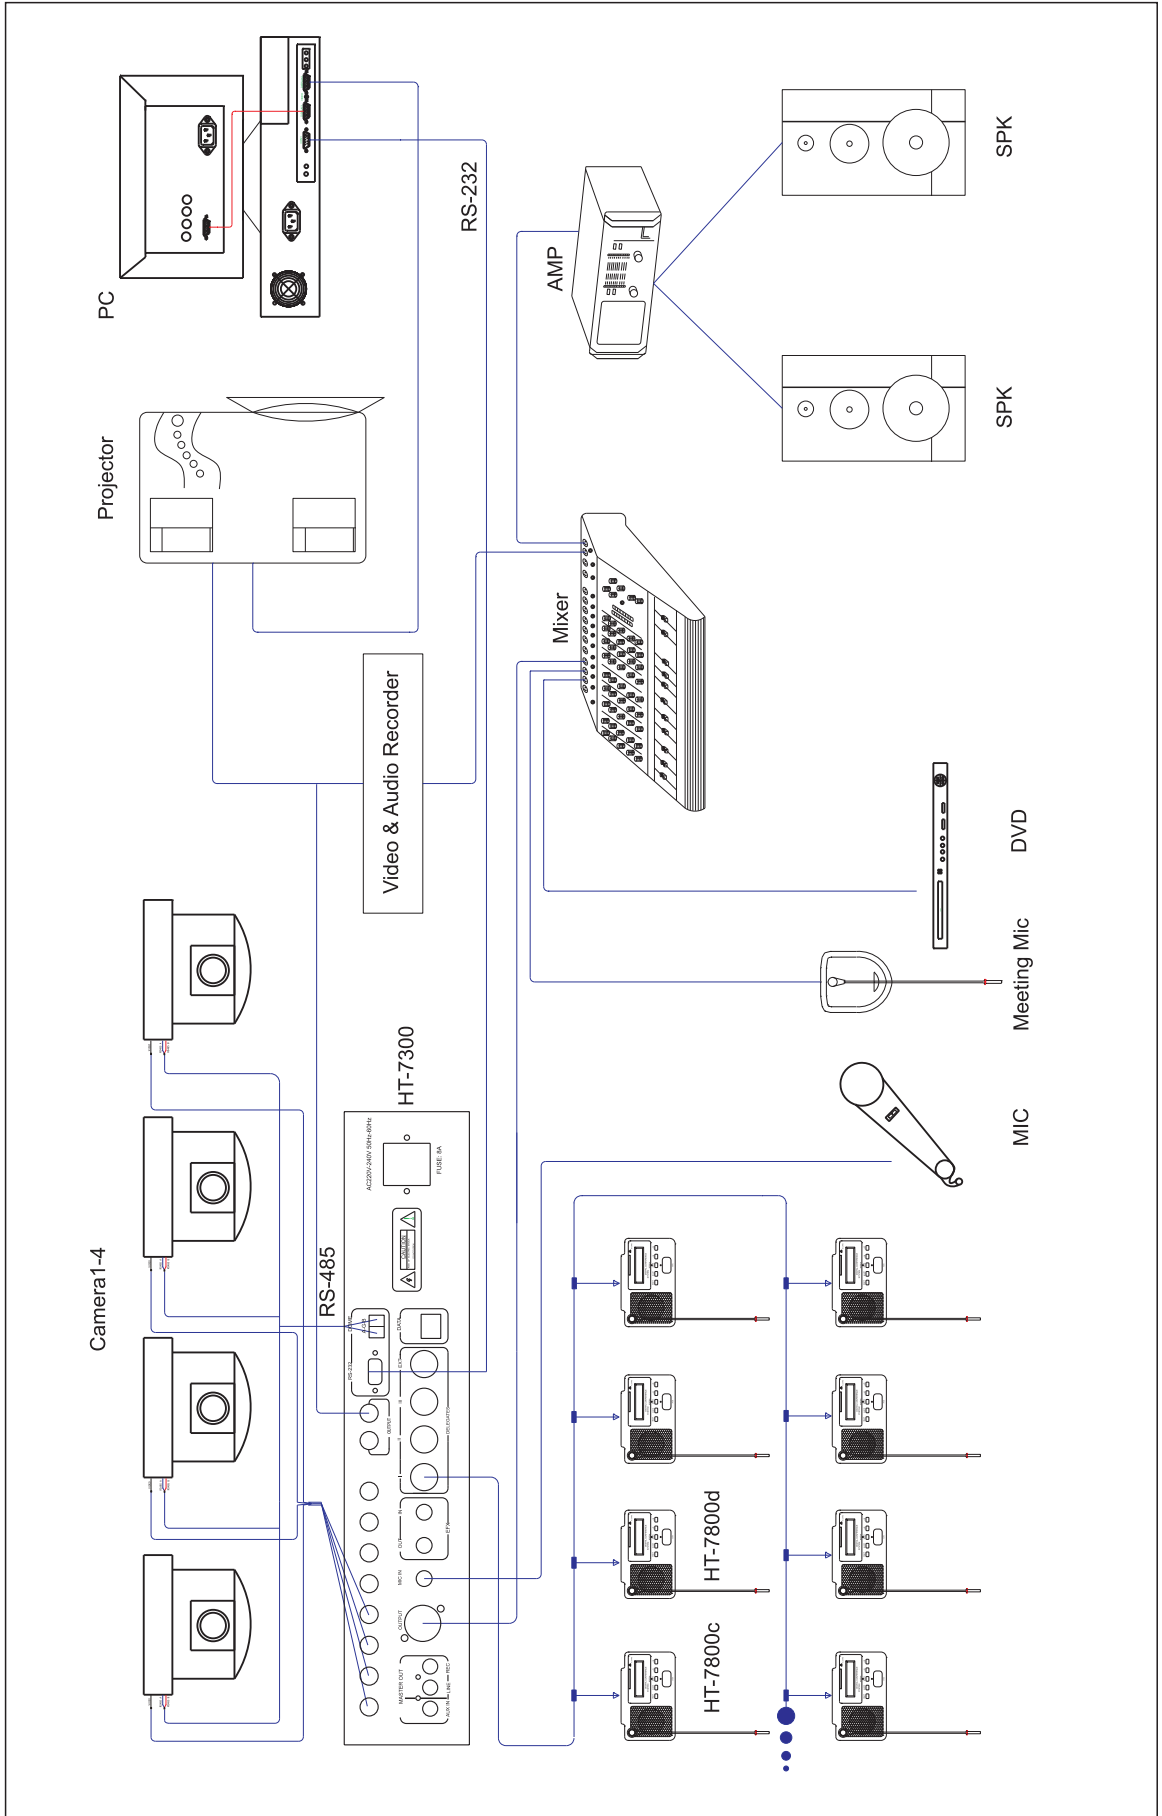

HT-7200 System Connection Diagram

